



**METAL BASE BOARD AND ELECTRONIC APPARATUS****Publication number:** JP7050460**Publication date:** 1995-02-21**Inventor:** HAYASHI SATORU**Applicant:** MITSUBISHI ELECTRIC CORP**Classification:**

**- international:** B32B15/08; H01L23/14; H01L23/373; H05K1/03;  
H05K1/05; B32B15/08; H01L23/12; H01L23/34;  
H05K1/03; H05K1/05; (IPC1-7): H05K1/05; B32B15/08;  
H05K1/03

**- european:** H01L23/14M; H01L23/373H; H01L23/373L;  
H01L23/373P; H05K1/05C

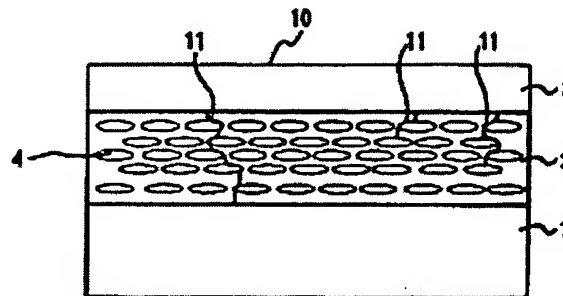
**Application number:** JP19930196398 19930806**Priority number(s):** JP19930196398 19930806**Also published as:**

 GB2280782 (A)  
 DE4427994 (A1)

**Report a data error here****Abstract of JP7050460**

**PURPOSE:** To obtain a metal base board wherein heat dissipating characteristics of a board are excellent, application at a high voltage is possible, and resistance to discharge is large.

**CONSTITUTION:** In a metal base board 10 constituted of a metal board 1, circuit conductor 3, and an insulating layer 2 interposed between the circuit conductor 3 and a metal board 1, the insulating layer 2 is composed of organic insulating material to which inorganic filler 4 in a state of flake is added, and the inorganic filler 4 are laminated to improve resistance to discharge.

**FIG. 1**

Data supplied from the esp@cenet database - Worldwide